


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @100KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms) pin (3,4,5-8,9,11)
	3,4-1,2:7,9-8,10:5-6:11-12	3,4-1,2	3,4-1,2 (short other pins)	3,4-1,2	5-6	7,9-8,10	11-12	
EFD-256SG	1:0.125:0.25:0.25	L _{0A} =57 L _{2.0A} ≥90%(L _{0A})	1.2	60	350	8	350	1500

SCHEMATICS

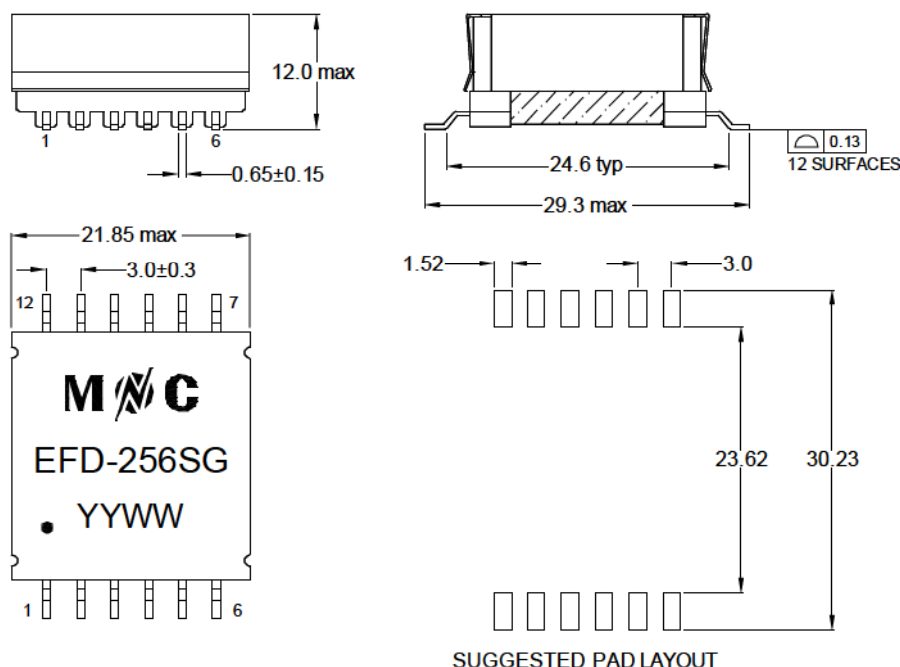

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

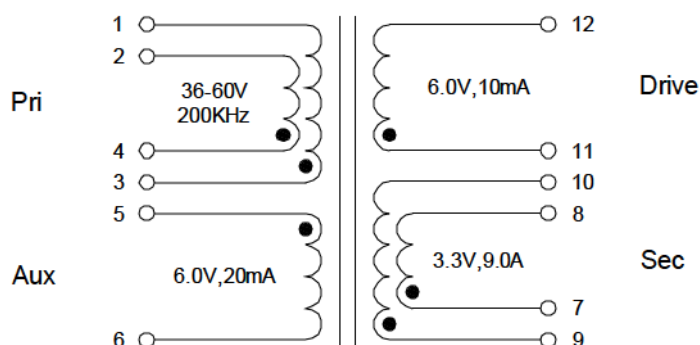

Tape&Reel Weigh 150pcs per reel 13.20g/pcs