


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.1V	LK(uH max) @200KHz,0.1V	DCR (mΩ max)			HI-POT (DC)
	2-4:11,12-9,10:1-6	2-4	2-4 (short other pins)	2-4	1-6	11,12-9,10	Pri/Aux-Sec
EFD-262SG	1:0.12:0.47	L _{0A} =94 L _{1.2A} ≥ 90%(L _{0A})	3.9	210	453	10	1500

SCHEMATICS

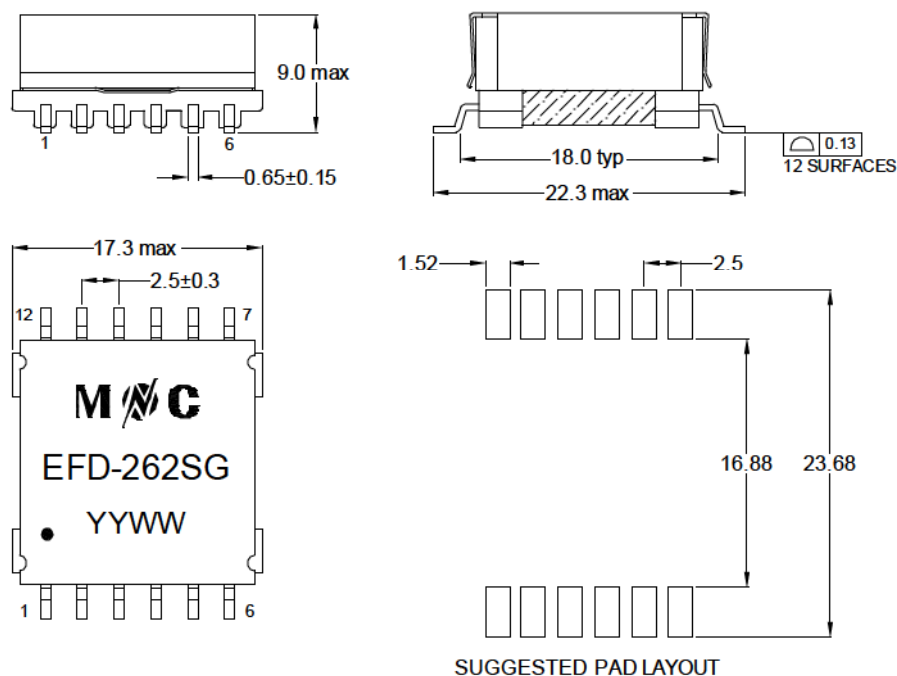

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

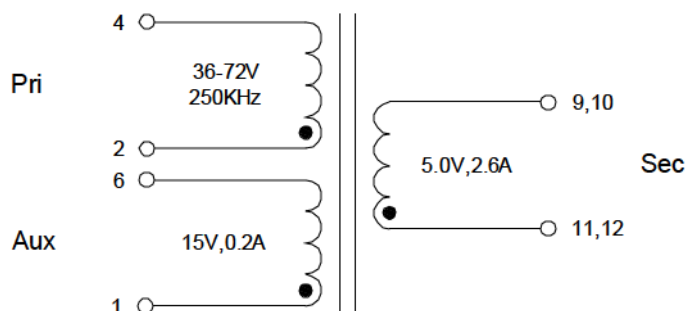

Tape&Reel Weight 250pcs per reel 6.08g/pcs