


- IEC60950 Compatible.
- RoHS Compliant.
- Surface Mount Device.
- Operating temperature range (Including self temperature rise): -40 °C to +125 °C.



Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @200KHz,0.2V	LK(uH max) @200KHz,0.2V	DCR (mΩ max)			HI-POT (Vrms)
	5-4:8,9-6,7:2-1	5-4	5-4 (short other pins)	5-4	2-1	8,9-6,7	Pri/Aux-Sec
EP-420SG	1:0.166:0.5	L _{0A} =127 L _{1.0A} ≥ 90%(L _{0A})	1.25	225	310	12	1500

SCHEMATICS

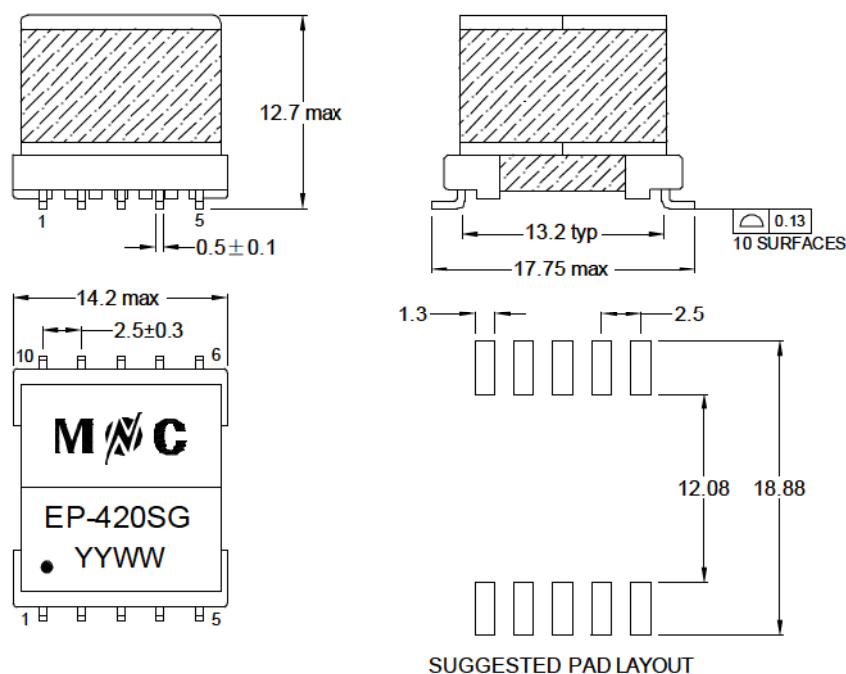

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

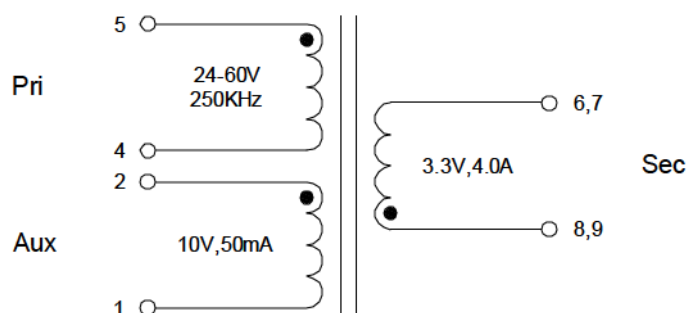

Tape&Reel Weigh 200pcs per reel
6.35g/pcs