

IEC60950 Compatible.

RoHS Compliant.

Surface Mount Device.




Operating temperature range (Including self temperature rise): -40 °C to +125 °C.

Electrical Specifications @25 °C


Part Number	Turns Ratio(±3%)	OCL(uH±10%) @10KHz,0.1V	LK(uH max) @100KHz,0.1V	DCR (mΩ max)				HI-POT (Vrms) pin (2,4-7,9)
	2-3:7-8:9-10:5:4	2-3	2-3 (short other pins)	2-3	5-4	7-8	9-10	
EP-527SG	1:0.312:0.125:0.25	L _{0A} =90 L _{1.9A} ≥ 80%(L _{0A})	2.0	300	120	27	40	1500

SCHEMATICS

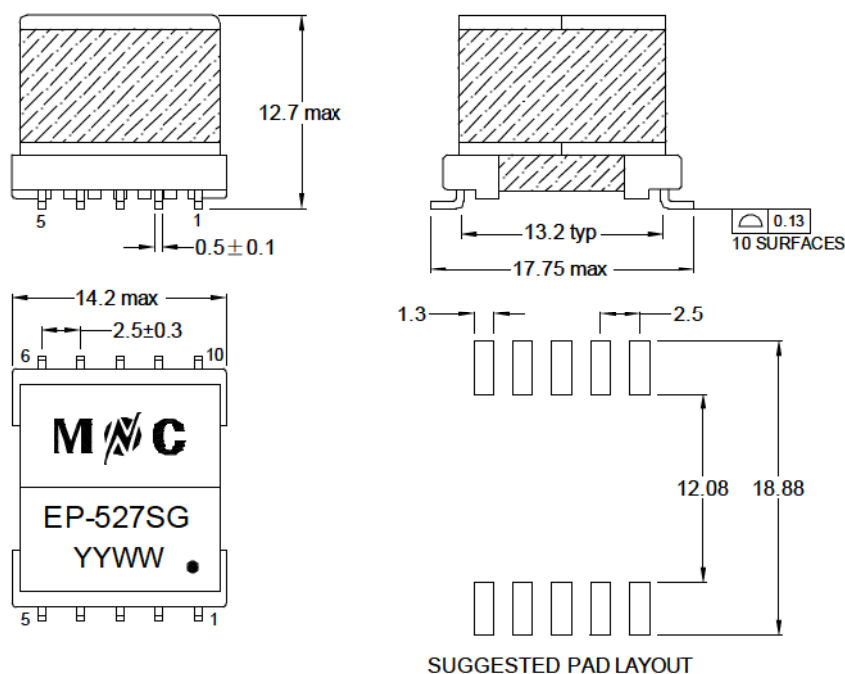

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

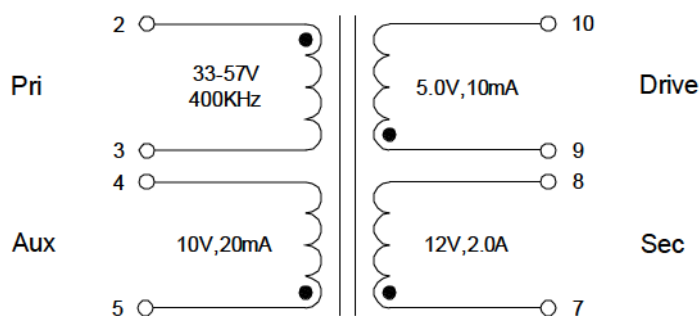

Tape&Reel Weight 200pcs per reel 6.60g/pcs