

- RF Transformer
- Impedance=75Ω
- Operating temperature range: -40℃ to 85℃
- Storage temperature range: -55℃ to +100℃
- RoHS compliant







Electrical Specifications @25℃

Part Number	Ω Ratio	Insertion Loss			DC Current	RF Power	Frequency
		Sec: Pri(1-3:6-4)	2000-3000MHz	1200-2000MHz			
RFT-027SG	1		3.0dB	2.0dB	30mA	0.25W	5-3000MHz

Note: Insertion Loss is referenced to mid-band loss, 1.0dB typ.

MECHANICAL

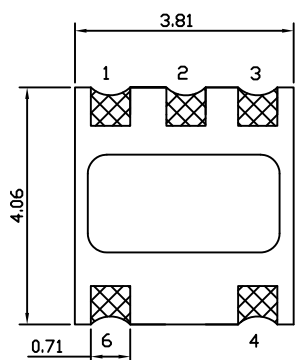

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

