

- RF Transformer
- Impedance=50Ω
- Operating Temperature range: -20℃ to 85℃
- Storage Temperature range: -55℃ to +100℃
- RoHS Compliant







Electrical Specifications @25℃ Z₀=50Ω

Part Number	Ω Ratio	Insertion Loss			DC Current	RF Power	Frequency
	Pri:Sec(6-4:3-1)	200-1400 MHz	300-1300 MHz	800-1100 MHz			
RFT-076SG	1:4	3.0dB	2.0dB	1.0dB	30mA	250mW	200-1400 MHz

Note: Insertion Loss is referenced to mid-band loss, 0.7dB Typ.

MECHANICAL

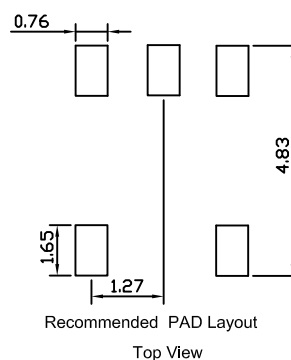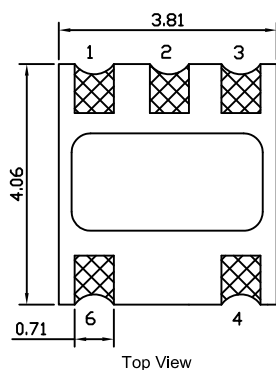

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

